


WELDOLET®

**REDUCING
DBL. EXTRA STRONG
& SCH. 160**

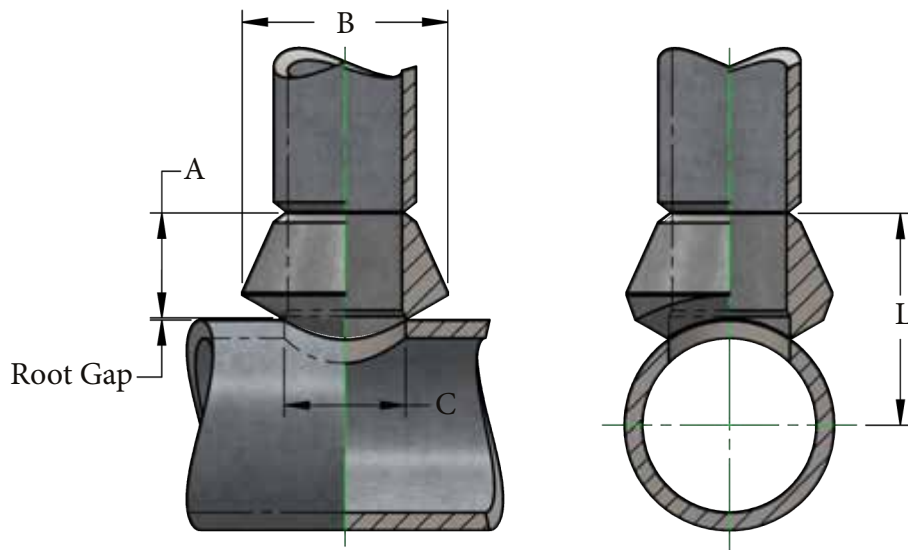

$$L = A + (\text{Run Pipe OD})/2 + \text{Root Gap}$$

Outlet Size	Dimensions			Weight
	A	B	C	
NPS ½	1 ⅛	1 ⅜	⅝	0.250
NPS ¾	1 ¼	1 ¾	¾	0.700
NPS 1	1 ½	2	1	0.850
NPS 1 ¼	1 ¾	2 ⅞	1 ⅝	1.250
NPS 1 ½	2	2 ¾	1 ½	1.750
NPS 2	2 ⅜	3 ⅜	1 ⅞	2.150
NPS 2 ½	2 ⅞	3 ⅞	2 ⅝	3.400
NPS 3	2 ⅞	4 ¾	2 ⅞	6.300
NPS 4	3 ⅝	6	3 ⅞	10.500
NPS 5	3 ⅞	7 ⅞	4 ⅞	14.250
NPS 6	4 ⅞	9 ⅝	5 ¾	28.000

► Larger outlet sizes available upon request



		RUN SIZE CONSOLIDATIONS							
		Outlet Size							
RUN SIZES	½	¾	1	1 ¼	1 ½	2	2 ½	3	4
	1 ¼ - ¾	2 - 1 ¼	2 ½ - 1 ¼	2 ½ - 2	2 ½ - 2	2 ½	3	3 ½	6
	36 - 1 ½	6 - 2 ½	10 - 3	10 - 3	3 ½ - 3	3 ½ - 3	3 ½	4	8
	FLAT	36 - 8	36 - 12	36 - 12	8 - 4	5 - 4	4	5	10
		FLAT	FLAT	FLAT	20 - 10	8 - 6	5	6	12
					22	18 - 10	8 - 6	8	14
					36 - 24	36 - 20	12 - 10	10	16
					FLAT	FLAT	18 - 14	12	18
							36 - 20	14	20
							FLAT	16	22
							18	24	
							20	FLAT	
							22		
							24		
							FLAT		

► For outlet sizes NPS 5 and larger, order to specific run size required.
 ► A FLAT Weldolet can be used for connections to pipe larger than NPS 36, welding caps, elliptical heads and flat surfaces.